



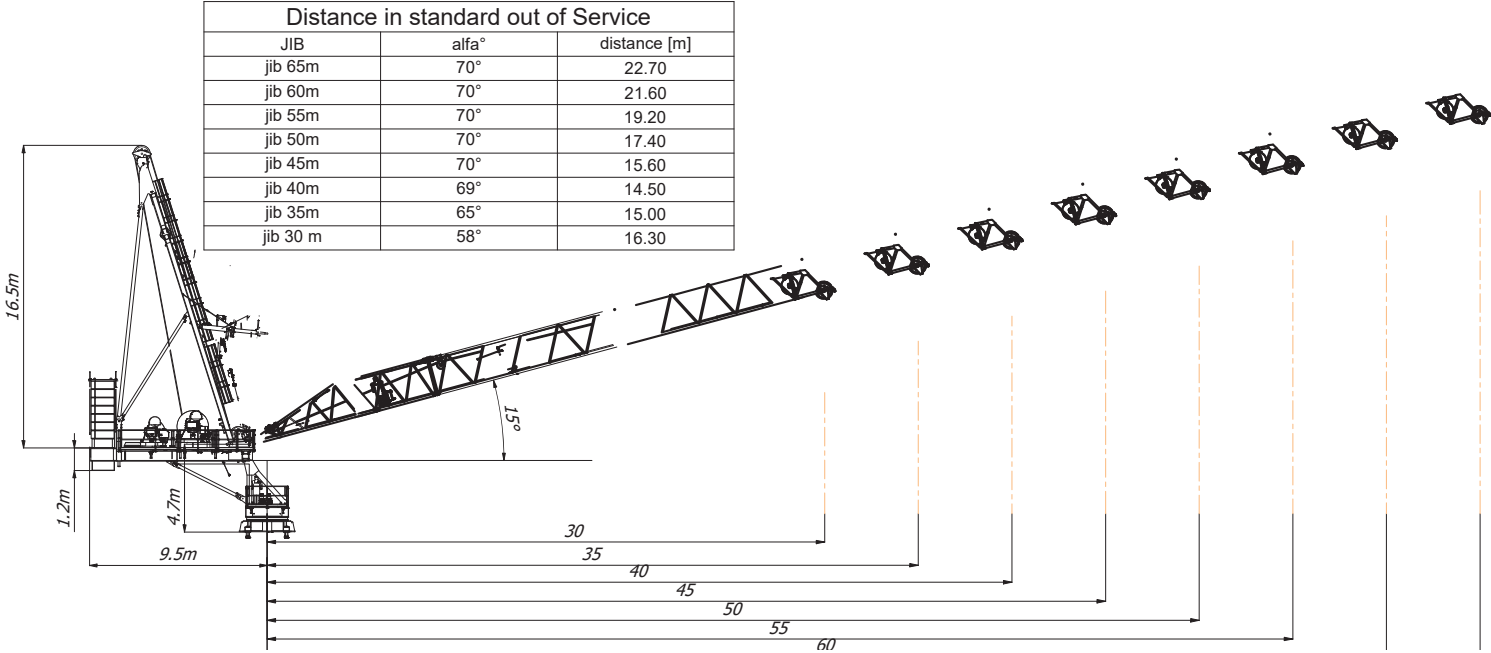


RTL 655 - 32 M-LIFT*													
	(t)	m	15	20	25	30	35	40	45	50	55	60	65
●	16,00	42,28	16,00	16,00	16,00	16,00	16,00	16,00	14,89	12,41	10,38	8,69	7,26
●	16,00	41,23	16,00	16,00	16,00	16,00	16,00	16,00	14,75	12,07	9,87	8,04	6,49
●	16,00	43,78	16,00	16,00	16,00	16,00	16,00	16,00	15,62	13,07	10,98	9,24	
●	16,00	42,62	16,00	16,00	16,00	16,00	16,00	16,00	15,33	12,58	10,34	8,47	
●	16,00	44,73	16,00	16,00	16,00	16,00	16,00	16,00	16,00	13,45	11,33		
●	32,00	26,24	32,00	32,00	32,00	27,61	22,25	18,23	15,11	12,61	10,56		
●	16,00	45,94	16,00	16,00	16,00	16,00	16,00	16,00	16,00	13,97			
●	32,00	27,07	32,00	32,00	32,00	28,60	23,10	18,98	15,77	13,20			
●	16,00	45,00	16,00	16,00	16,00	16,00	16,00	16,00	16,00				
●	32,00	28,35	32,00	32,00	32,00	30,20	24,47	20,17	16,83				
●	16,00	40,00	16,00	16,00	16,00	16,00	16,00	16,00					
●	32,00	29,17	32,00	32,00	32,00	31,17	25,30	20,90					
●	16,00	35,00	16,00	16,00	16,00	16,00	16,00	16,00					
●	32,00	29,56	32,00	32,00	32,00	31,55	25,63						
●	16,00	30,00	16,00	16,00	16,00	16,00	16,00						
●	32,00	30,00	32,00	32,00	32,00	32,00	32,00						

* Moritsch system to increase the lift 10%




MINIMUS RARIUS

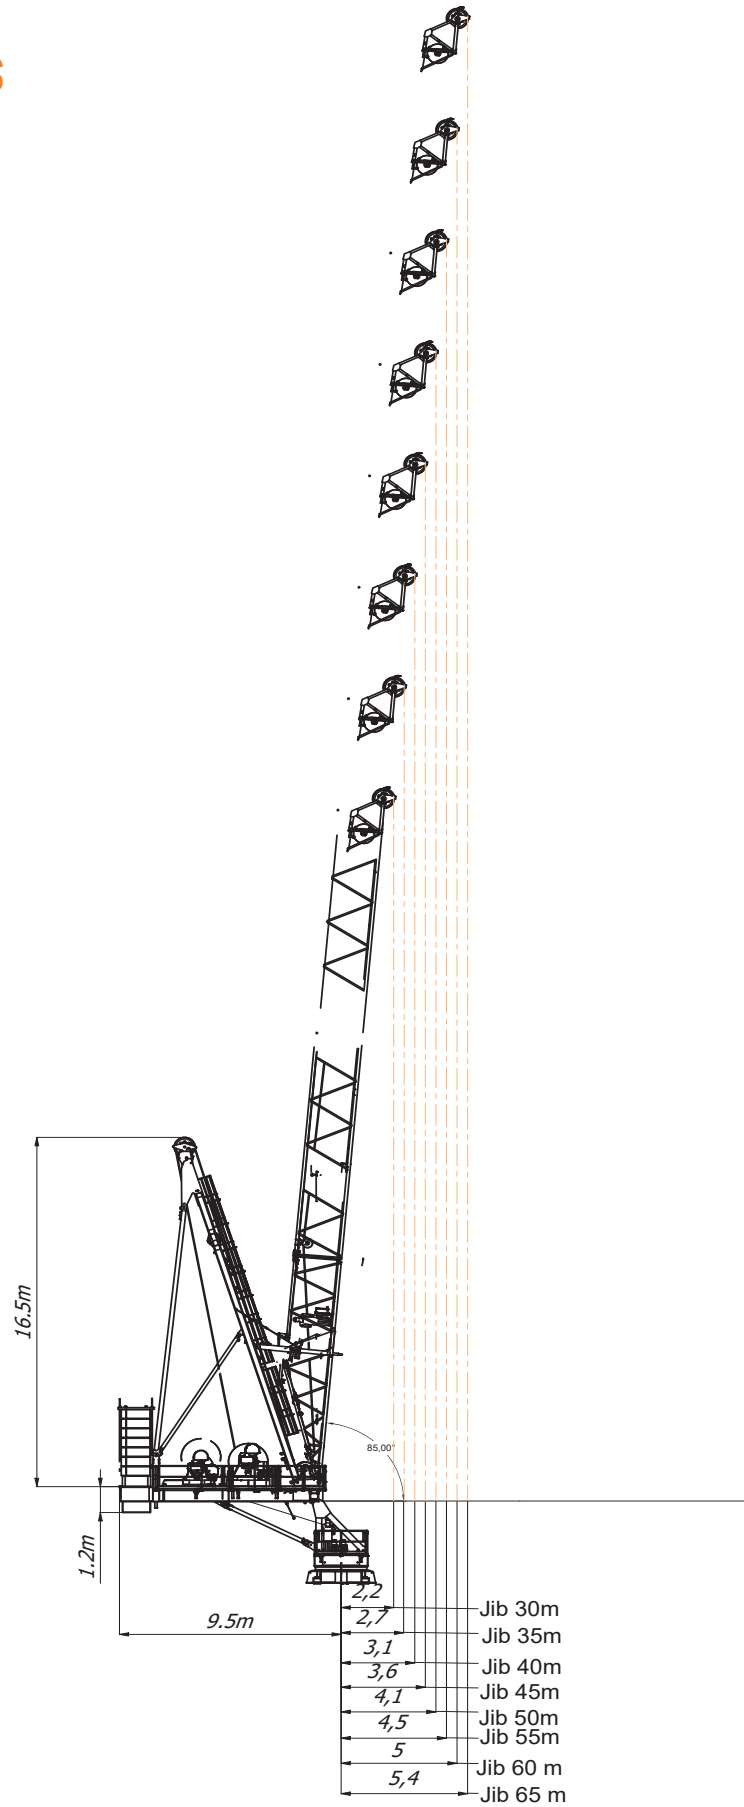

OOS 80 50-55-60-65m

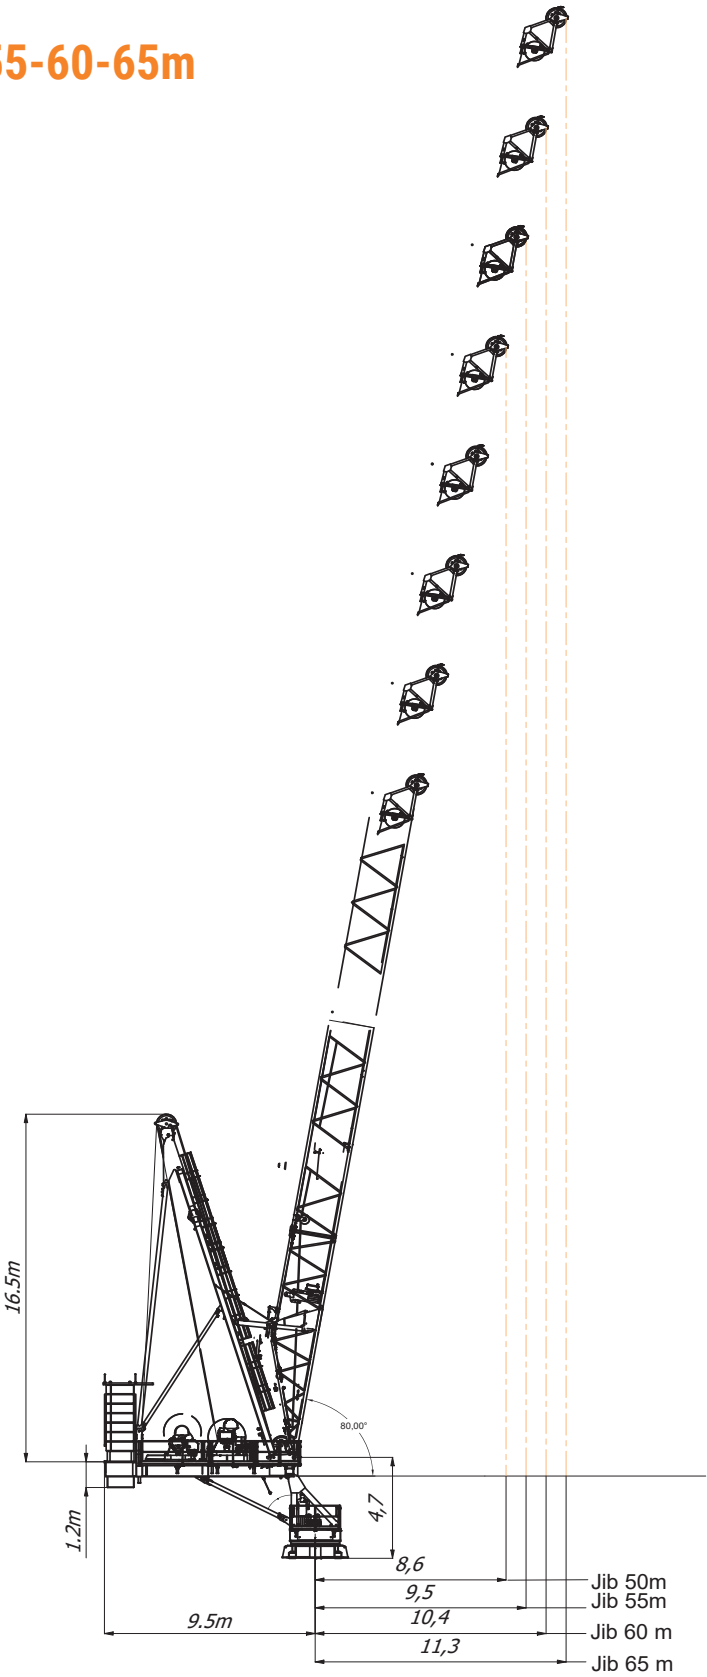


HR 23

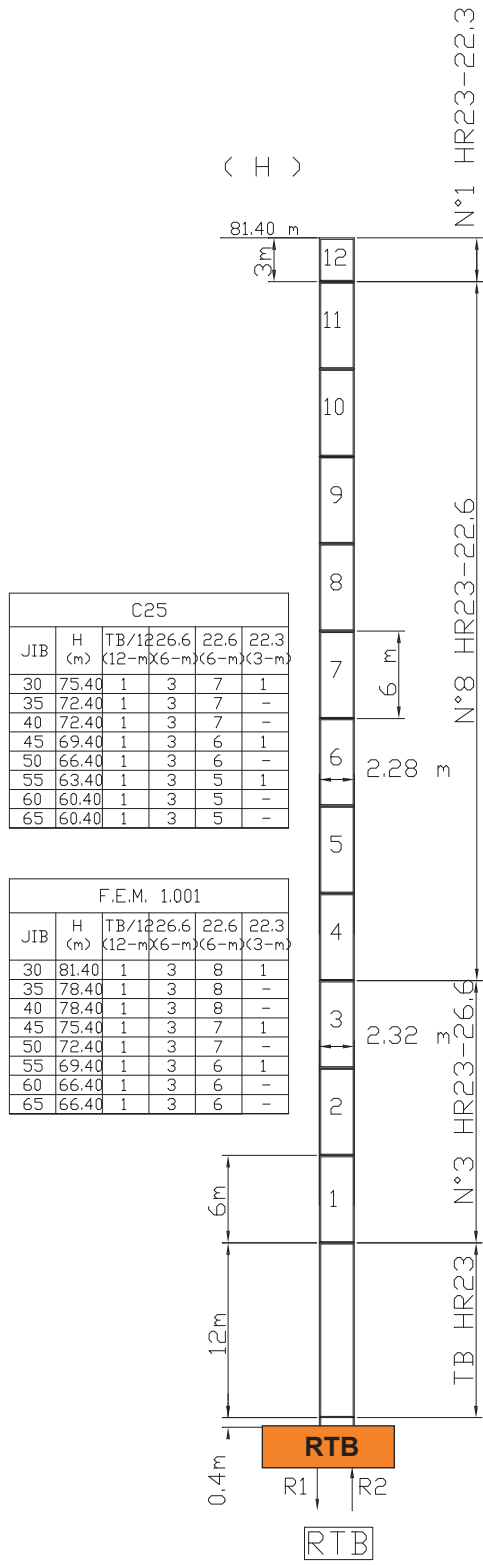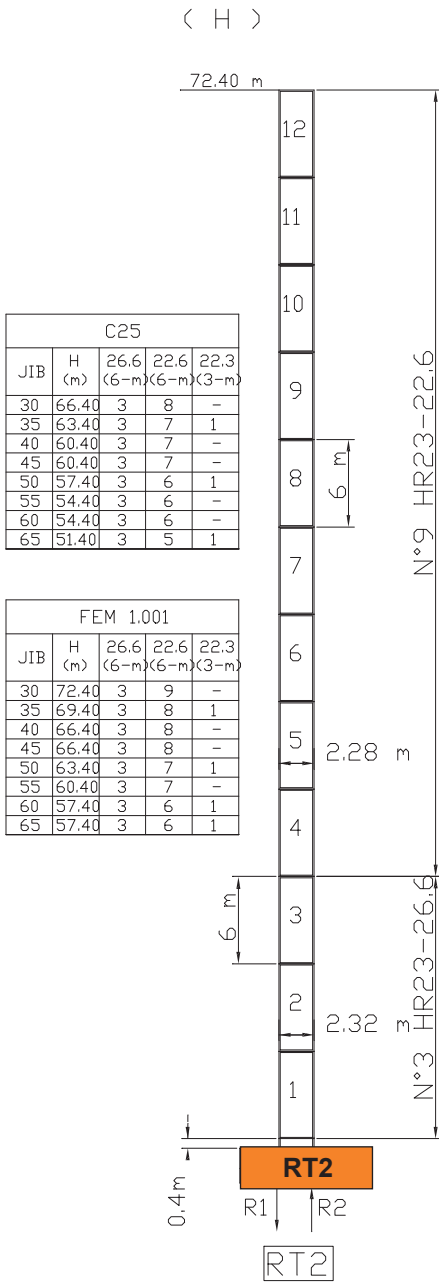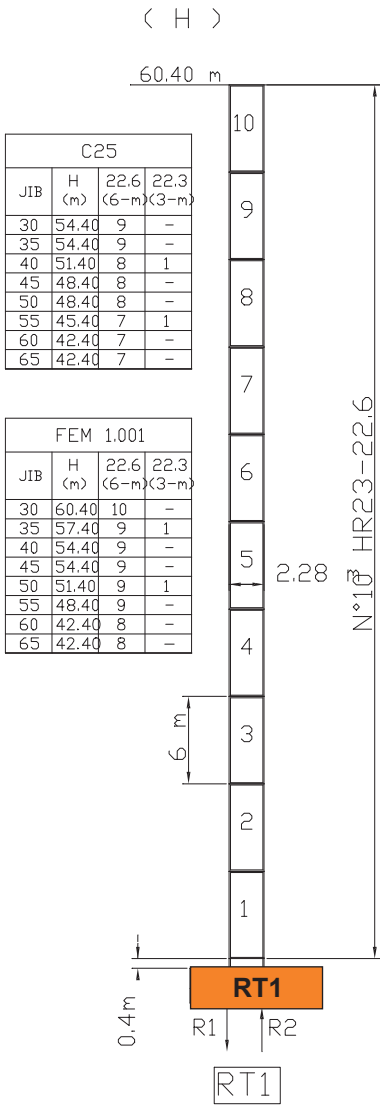

INTERNAL CLIMBING HR19

RTL 655 32T

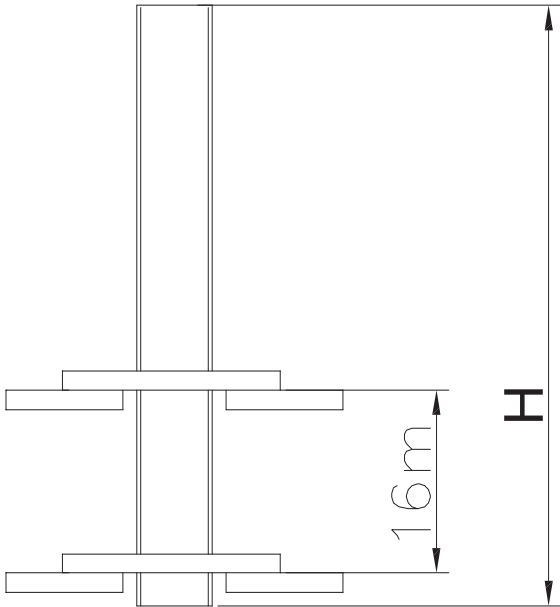


C25 Bulding 160m		
JIB	H (m)	C (m)
30	48.00	16
35	48.00	16
40	48.00	16
45	48.00	16
50	48.00	16
55	48.00	16
60	42.00	16
65	42.00	16

INTERNAL CLIMBING
HR19

MECHANISMS

150



150 kW



240 m

	80 kW
	4 x 11 kW

 2000/14/CEE 2005/88/CEE	 2006/95/CEE	400 V	50 Hz	MAX POWER
		460 V	60Hz	345 kVA



650 m

MORITSCH CRANES S.R.L.

Via Ramentera, 52
32035 Santa Giustina - BL - Italy
+39 0437 1840396 - info@moritsch.it
www.moritsch.it